

Rooflight with pleated blind and net
for installation in caravans and mobile homes




MPK Metall- und
Plastikverarbeitung GmbH & Co. KG
Friedrich-Ebert-Str. 298-300
D-58566 Kierspe
mpk-kierspe.de

VisionStar L pro LED

Technical data:

Aperture	700 x 500 mm
Roof thickness	25 bis 60 mm
Corner radius	23 mm
Site dome	815 x 583 mm
Height over roof	105 mm
Ventilation	0 bis 150 cm ²
Weight	8,4 kg
Size inner frame	872 x 610 x 37 mm
Outer frame material	Polypropylene
Dome material	Polycarbonate
Speed limit: <i>inst. transverse</i>	160 km/h
<i>inst. lengthways</i>	130 km/h
Authorization	ECE R43 -019651
<u>LED-light</u>	<u>575 x 9 x 2,5 mm</u>
Light color	~ 3000 K (warm white)
Energy efficiency class	F
Nom. useful luminous flux	2 x 500 lm
Voltage	12 -14V DC
Consumption	2 x 5,6 kW/h / 1000h
Nominal lifetime	10.000h
No. of switching cycles	50.000
Warm up time	<1sek.
Nominal beam angle	60°

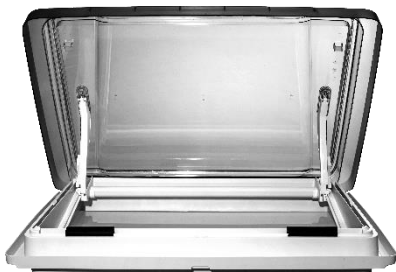

Included with delivery

- 1x Rooflight with outer frame
- 1x Inner frame with LED, polyswitch fuse, connection cable
- 1x Fixing parts (14 St. fixing brackets, 4 St. large plastic screw)

Additionally required for installation (not included in delivery)

- 1x Elastic sealant adhesive, e.g. Dekalin Dekaseal 8936 or SikaLastomer®-710
- 14x Fixing screws for the upper frame
Pan 3,5 mm / head according to DIN ISO 7049 (DIN 7981) / The length of the screw should be determined by the roof thickness, plus approximately 10 mm for the screw to enter the upper frame.

With timber support under the roof lining:

- 4x Fixing screws for the inner frame:
Pan 3,5 mm / head according to DIN ISO 7049 (DIN 7981) / length max. 10 mm

Explanation of symbols



NOTE

Particularly important information.



ATTENTION!

Failure to observe can lead to material damage.




WARNING!

Safety note: Serious risk of injury.

Safety and installation instructions

- Check the roof thickness of your vehicle before mounting.
- **The rooflight should only be fitted to a flat roof surface, both internally and externally.**
- Choose a fitting position that will not interfere with other roof mounted components (e.g. roof-racks/antenna's etc.) and avoid internally installed electrical cables and furniture, which could impede the correct operation of the rooflight.



Inner frame

- Make sure that there is a suitable supply line and switch for the lighting in the vehicle.
- We recommend installation with the hinge side in the direction of travel. In the caravan, the rooflight can alternatively be fitted with hinges to the right/left side of the vehicle, provided the rooflight is not fitted to the front edge of the vehicle roof.
- Never stand on the dome of the rooflight!
- **Do not open the rooflight while driving.** The rooflight must be locked down before traveling.
- Do not open the rooflight in strong wind or rain.
- Close the rooflight during rain and snowfall.

EN Installation and Operating Instructions

Please read the instructions carefully before installing the rooflight and store it for future.



We cannot be held responsible for incorrect fitting, handling or operation. Any product faults relating to the production and materials used should be notified to us via an authorised dealer immediately.

Installation




Please clean the frames carefully before mounting the sealant.




! Follow the instructions of the sealant manufacturer.

Separate the inner and outer frames and fit the outer frame to the outside of the roof aperture onto a bed of sealant.



Place over the screw holes on the inside of the frame, the 14 fixing brackets. Secure with screws. Stop as soon as the brackets start to distort.

! Max. Torque 0.5 Nm.

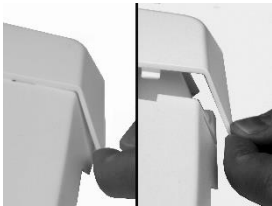



To fit the inner frame, gently pull out the pointed ends of the cover profiles to release them and reveal the fixing points.



! Turn off the power supply in the vehicle before proceeding with the connection of the LED lighting.

Connect the supplied connection cable to the power supply installed in the vehicle.

Connect the Polyswitch cable of the inner frame to the power supply of the vehicle. Then place the inner frame in the center of the cutout.

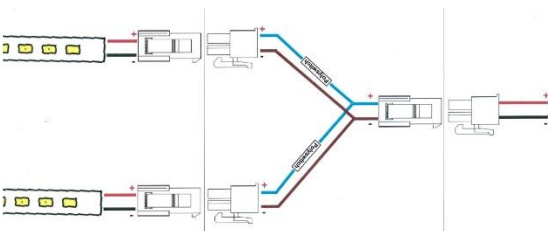


Version 1: Timber support under the roof lining

Offer up the inner frame into the outer frame. Use the four small holes to fix the inner frame with standard screws into the timber support.

Version 2: Inner lining made of plywood / polyester layer

Offer up the inner frame into the outer frame and mark drill holes (large screw hole). Pre-drill the screw holes and screw the inner frame tight with the supplied plastic screws.



Fix the connector from the inner frame with the connector from the side panel before inserting the side cover.



Refit the inner frame covers by locating the securing lugs and keeping the covers parallel against the roof whilst sliding them carefully onto the frame, 'clicking' back into position, without distorting.

Operation



To open the rooflight, both pleated blinds must be open.

Grip the crossbar in the middle and turn it towards the opening side. Now the rooflight can be opened by pushing the crossbar. As soon as you release the crossbar the opening mechanism snaps into this position.

To close the rooflight, turn it again and push it back in the opposite direction. When the end position is reached, the rooflight is locked automatically.

- !** Keep the pleated blinds open while driving to avoid driving noise and damage from the airstream.
- To avoid heat accumulation do not close blind completely during the day. Open both pleats when not using the vehicle.

Permanent ventilation

The rooflight is supplied without permanent ventilation. If required, the rooflight can be converted by shortening the inserted seal.



Without free-air-flow

Rubber seal all around

With free-air-flow 75cm²

Side rubber seals shortened to 34cm.
Rear rubber seal shortened to two sections each 8,1 cm

With free-air-flow 150 cm²

Side rubber seal removed
Rear rubber seal shortened to two sections each 8,1 cm



Free-air-flow 75cm² lengthways


Rubber seal hinge side shortened to 45 cm.
Opposite seal shortened to two sections of 8,1 cm each.



Free-air-flow 150cm² lengthways

Rear rubber seal shortened to 20cm.
Rubber seal hinge side removed.
Opposite seal shortened to two sections of 8,1 cm each.

Cleaning

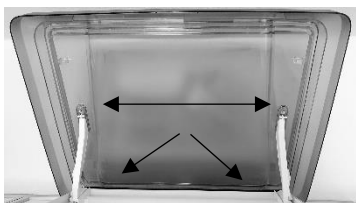

For easier cleaning, the dome can be removed from the inner frame by releasing the plastic split pins.



Do not loosen any screws that are used to fasten the dome or the opening mechanism.

Use only clear water and a soft sponge.



Solvents may attack the plastic and make it brittle.

After cleaning, maintain the sliding surfaces with a thin layer of Vaseline or WD40. This makes the extension mechanism glide more easily. The rubber seals can be maintained with talcum powder.

Pay attention that the pins positively click into the locked position when re-installing the dome. The lever arm pins should be re-installed with the flat side towards the dome.

Clean the pleated blinds with a soft brush, dry cloth or feather duster.



We strongly advise against wet cleaning, as this can damage the insect screen and blackout pleated blind.

Extras (optional)

Designation	Article No.
Adapter frame for Fiat Ducato, front	7050ARW
Adapter frame for Fiat Ducato, rear	7050ARW1
Rubber seal without permanent ventilation	7503.11

Warranty

The legal warranty applies.

Disposal



Dispose of the appliance and packaging must be effected in accordance with the corresponding local regulations and requirements for electrical appliances and packaging.



mpk-kierspe.de/Downloads